



GAS
FIREPLACES



Q1 Fireplace – Black Enameled Steel Liner, High Definition Log Set



Q1 Fireplace – Ceramic Brick Liner, High Definition Log Set



Q1 Fireplace – Ceramic Brick Liner, High Definition Log Set

Design Features

- Clean Face Look — No Louvers
- Hand Welded Firebox
- 150 CFM Room Fan (with variable control)
- Limited Lifetime Warranty
- ClearView Safety Screen
- Quick Access Valve Controls
- Remote or Thermostat Control
- Top or Rear Vent

Available Options

- Burner Options:
 - High Definition Log Set (Included)
- Liner Options:
 - Steel Painted Liner (Included)
 - Ceramic Brick Liner
 - LedgeStone Liner
 - Black Enameled Steel Liner

Fireplace Specifications

BTU Maximum Input - NG	20,000 BTU						
Turn Down	Up to 33%						
Heating Area	1,100 ft²						
P4 Efficiency	74.5%						
Visible Dimensions	20"w x 25¼"h						
Visible Glass Area	16⅝"w x 18¾"h						
Fireplace Install Dims.	<table><tr><td>HEIGHT</td><td>WIDTH</td><td>DEPTH</td></tr><tr><td>35¼"</td><td>25¼"</td><td>17⅛"</td></tr></table>	HEIGHT	WIDTH	DEPTH	35¼"	25¼"	17⅛"
HEIGHT	WIDTH	DEPTH					
35¼"	25¼"	17⅛"					

*Rear Vent Installation



High Definition Log Set



Brick Liner



Enameled Liner with High Definition Log Set



Q2 Fireplace – Slim Face Surround, Black Enameled Steel Liner, and Driftwood Log Set



Q2 Fireplace – Slim Face Surround, Black Enameled Steel Liner and Glass Burner with Diamond Glass



Q2 Fireplace – Slim Face Surround, Herringbone Liner, and Traditional Log Set

Design Features

- Clean Face Look — No Louvers
- Hand Welded Firebox
- 150 CFM Room Fan (with variable control)
- ClearView Safety Screen
- Limited Lifetime Warranty
- Remote or Thermostat Control

Available Options

- **Burner Options:**
 - Traditional Log Set
 - Driftwood Log Set
 - Glass Burner with Diamond Glass
- **Liner Options:**
 - Painted Black Firebox - *Included*
 - Ceramic Brick Liner
 - Herringbone Liner
 - Black Enameled Steel Liner
- **Surround Options:**
 - Slim Face - *Included*
 - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	24,000 BTU
Turn Down	33%
Heating Area	1,400 ft ²
P4 Efficiency	69.3%
Visible Dimensions	33¼"w x 29½"h
Visible Glass Area	26"w x 21¼"h
Fireplace Install Dims.	WIDTH 34⅞" HEIGHT 40" DEPTH 15⅞"



Traditional Log Set



Glass Burner with Diamond Glass



Driftwood Log Set



Q3 Fireplace – Forgeworks Surround, Ceramic Brick Liner, and Traditional Log Set



Q3 Fireplace – Black Enameled Steel Liner, and Traditional Log Set



Q3 Fireplace – Brick Liner and Traditional Log Set

Design Features

- Clean Face Look — No Louvers
- Hand Welded Firebox
- High Efficiency Heat Exchanger
- 150 CFM Room Fan (with variable control)
- Fixed Top Vent / Adjustable Rear Vent
- ClearView Safety Screen
- Limited Lifetime Warranty
- Remote or Thermostat Control

Available Options

- Burner Options:
 - Traditional Log Set (Included)
- Liner Options:
 - Ceramic Brick Liner
 - Ledgerstone Liner
 - Black Enameled Steel Liner
- Surround Options:
 - Slim Face - *Included*
 - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	38,000 BTU		
Turn Down	Up to 33%		
Heating Area	2,000 ft ²		
P4 Efficiency	67.4%		
Visible Dimensions	33"w x 33"h		
Visible Glass Area	26"w x 24¼"h		
Fireplace Install Dims.	WIDTH 34⅞"	HEIGHT 43½"	DEPTH 18"



Traditional Log Set



Cast Iron Grate



High Efficiency Heat Exchanger



G39 Gas Fireplace – Painted Black Surround, Rustic Brown Ceramic Brick Liner, and Traditional Log Set



G39 Gas Fireplace – Painted Black Surround, Black Enamel Steel Liner, and Birch Log Set



G39 Gas Fireplace – Painted Black Surround, Black Enameled Steel Liner, and Glass Burner



G39 Gas Fireplace – Painted Black Surround, Ledgestone Liner, and Traditional Log Set

Design Features

- Adjustable Ember Bed Lighting
- Clean Face Look — No Louvers
- E-Coated Glass (Optional Ceramic Glass)
- Cool Surface System HDK Included
- 130 CFM Room Fan (with variable control)
- ClearView Safety Screen
- Limited Lifetime Warranty



Learn more at
enviro.com/bluiq

Available Options

- **Burner Options:**
 - Traditional Log Set
 - Birch Log Set
 - Driftwood Log Set
 - Glass Burner with Diamond Glass
- **Liner Options:**
 - Ceramic Brick Liner (Brown or Black)
 - Herringbone Liner
 - Ledgestone Liner
 - Black Enameled Steel Liner (Included w/Glass SKU)
 - Painted Steel Liner (Included w/Log SKU)
- **Surround Options:**
 - Slim Face in Painted Black (incl.)
 - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	30,000 BTU
Turn Down	Up to 33%
Heating Area	1,600 ft ²
P4 Efficiency	69.8%
Visible Dimensions	34"w x 38¼"h
Visible Glass Area	30"w x 24"h
Fireplace Install Dims.	WIDTH 41½" HEIGHT 42" DEPTH 18½"



Traditional Log Set



Birch Log Set



Driftwood Log Set



G42 Gas Fireplace – Forgeworks Surround, Rustic Brown Ceramic Brick Liner, and Birch Log Set



G42 Gas Fireplace – Painted Black Surround, Black Enameled Steel Liner, Traditional Log Set



G42 Gas Fireplace – Painted Black Surround, Black Enameled Steel Liner, and Driftwood Log Set



G42 Gas Fireplace – Painted Black Surround, Herringbone Liner, and Traditional Log Set

Design Features

- Adjustable Ember Bed Lighting
- Clean Face Look — No Louvers
- Ceramic Glass
- Cool Surface System HDK Included
- ClearView Safety Screen
- 130 CFM Room Fan (with variable control)
- Limited Lifetime Warranty



Learn more at
enviro.com/bluiq

Available Options

- **Burner Options:**
 - Traditional Log Set
 - Birch Log Set
 - Driftwood Log Set
 - Glass Burner with Diamond Glass
- **Liner Options:**
 - Ceramic Brick Liner (Brown or Black)
 - Herringbone Liner
 - LedgeStone Liner
 - Black Enameled Steel Liner (Included w/Glass SKU)
 - Painted Steel Liner (Included w/Log SKU)
- **Surround Options:**
 - Slim Face in Painted Black (incl.)
 - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	40,000 BTU
Turn Down	Up to 33%
Heating Area	2,000 ft ²
P4 Efficiency	69.6%
Visible Dimensions	43"w x 38"h
Visible Glass Area	34"w x 26 ⁷ / ₈ "h
Fireplace Install Dims.	WIDTH 48 ³ / ₄ " HEIGHT 50" DEPTH 23 ¹ / ₄ "



Forgeworks Face



Diamond Glass Burner



Traditional Log Set





G50 Gas Fireplace – Painted Black Surround, Ceramic Brick Liner, and Traditional Log Set



G50 Gas Fireplace – Painted Black Surround, Black Enameled Steel Liner, and Driftwood Log Set



G50 Gas Fireplace – Painted Black Surround, Painted Black Ceramic Brick Liner, and Birch Log Set

Design Features

- Adjustable Ember Bed Lighting
- Clean Face Look — No Louvers
- Two Stage Burner (Split Flow)
- Cool Surface System HDK Included
- ClearView Safety Screen
- Run-Quiet Fan System
- Limited Lifetime Warranty



Available Options

- **Burner Options:**
 - Traditional Log Set
 - Birch Log Set
 - Driftwood Log Set
 - Glass Burner with Diamond Glass
- **Liner Options:**
 - Ceramic Brick Liner (Brown or Black)
 - Herringbone Liner
 - LedgeStone Liner
 - Black Enameled Steel Liner (Included w/Glass SKU)
 - Painted Steel Liner (Included w/Log SKU)
- **Surround Options:**
 - Slim Face in Painted Black (incl.)
 - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	48,000 BTU
Turn Down*	67.5%
Heating Area	2,200 ft ²
P4 Efficiency	72.8%
Visible Dimensions	40"w x 51"h
Visible Glass Area	41⅜"w x 28"h
Fireplace Install Dims.	WIDTH 55" HEIGHT 50" DEPTH 23¼"

* Turn down takes into account the Split Slow burner



Adjustable Ember Bed Lighting



Glass Burner with Diamond Glass



Traditional Log Set



RZ41 Gas Fireplace – Painted Black Liner, and Traditional Log Set



RZ41 Gas Fireplace – Ledgestone Liner, and Traditional Log Set



RZ41 Gas Fireplace – Black Glass Liner, and Birch Log Set



RZ41 Gas Fireplace – Ceramic Brick Liner, and Traditional Log Set

RZ41

FIRE-UNDER-LOG
GASFIREPLACE

Design Features

- Adjustable Ember Bed Lighting
- Clean Face Look — No Louvers
- Ceramic Glass
- Cool Surface System HDK Included
- ClearView Safety Screen
- 130 CFM Room Fan (with variable control)
- Limited Lifetime Warranty

RISE BURNER
TECHNOLOGY

Available Options

- Burner Accents:
 - Traditional "Fire-Under-Log" Log Set
 - Birch "Fire-Under-Log" Log Set
- Liner Options:
 - Ceramic Brick Liner (Brown or Black)
 - Herringbone Liner
 - Ledgestone Liner
 - Black Enameled Steel Liner
 - Painted Steel Liner (*Included*)

Fireplace Specifications

BTU Maximum Input - NG	40,000 BTU
Turn Down	33%
Heating Area	2,000 ft ²
P4 Efficiency	66.2%
Visible Dimensions	34"w x 38¼"h
Visible Glass Area	31¾"w x 25½"h
Fireplace Install Dims.	WIDTH 41"HEIGHT 43½"DEPTH 20"



RISE Burner with Fire-Under-Log Technology




Adjustable Ember Bed Lighting



Optional Birch Log Set

Cool Surface System

INCLUDED WITH THE RZ41 & G SERIES

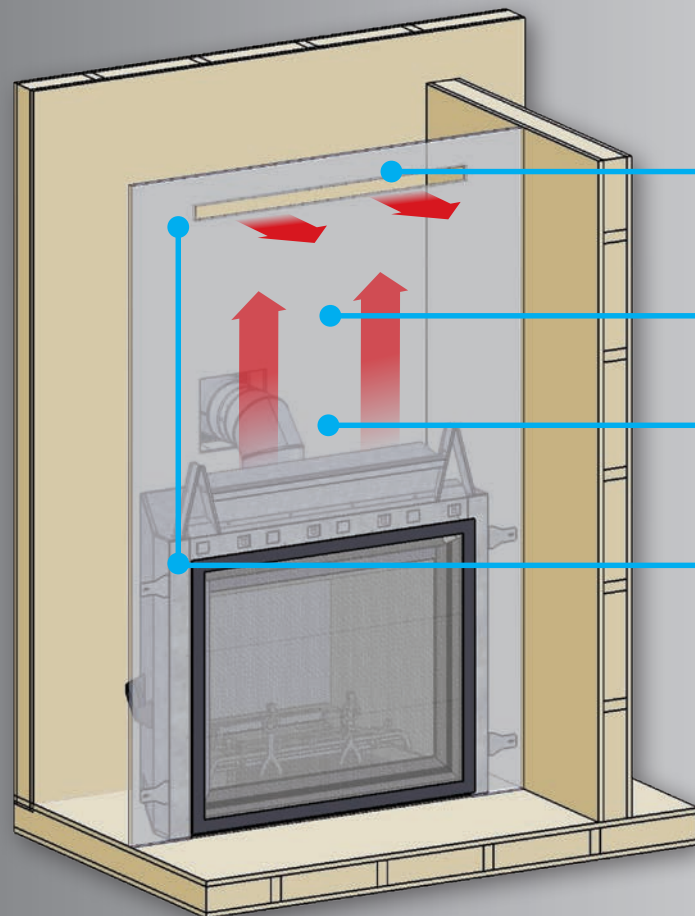

Convective heat that rises from the fireplace is captured in the chase and channeled through the vent using the Cool Surface System.

The Cool Surface System channels rising heat behind the wall.

Allows up to 1" thick combustible material (ie: drywall) to be used.

The Cool Surface System and vent bezel are included with every G Series unit and the RZ41.

We understand that surface temperatures are an important factor when considering how a fireplace will affect HDTVs or any framed decorations that might be mounted above. The Cool Surface System offers you peace of mind.

We designed this system to help channel excess rising heat up behind the wall and safely push it through an included vent bezel bypassing any valuables above your fireplace.


Rising heat is evenly vented forward into the living space through the included bezel

Rising heat is channeled safely past valuable wall mounted items such as a TV

Heat radiates forward from the fireplace window

Power Vent Kit OPTIONAL FOR THE RZ41 & G SERIES

- A minimum venting run of 10 feet
- A maximum venting run of 110 feet
- Max of 6 elbows in vent configuration
- Venting can run downward 4' below the unit
- Flush mount (paintable) termination
- All stoves EXCEPT the G39 require part #50-2321 (Or you can order part #58DVA-X46 directly from DuraVent) vent reducer (5 x 8" vent reduced to 4 x 6 5/8" vent)
- Utilizes smaller 4 x 6 5/8" venting
- Run Quiet Fan System (noise reduction)

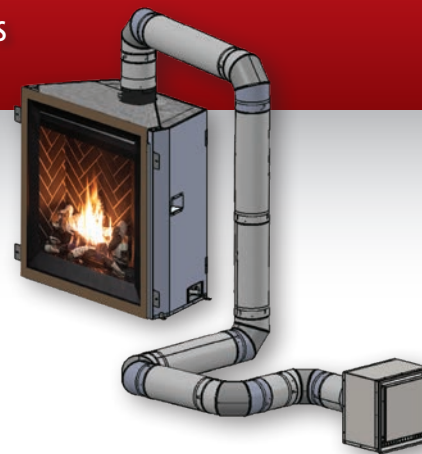

Fireplace Design Elements

Q1 FIREPLACE



MODERN SURROUND



MINIMAL SURROUND



4-SIDED MINIMAL SURROUND

Q2 FIREPLACE



SLIM FACE
Included



FORGEWORKS FACE
Midnight Bronze

Q3 FIREPLACE



SLIM FACE
Included



FORGEWORKS FACE
Midnight Bronze

G SERIES FIREPLACES



SLIM SURROUND - PAINTED BLACK (G42 pictured)
Included with the G39, G42, G50, and RZ41



FORGEWORKS SURROUND - MIDNIGHT BRONZE (G42 pictured)
Available for the G39, G42, and G50

Fireplace Design Elements

FIREBOX LINERS




CLASSIC BRICK
Q1, Q2, Q3



RUSTIC BRICK
G39, G42, G50, RZ41



PAINTED STEEL
Q1, Q2, Q3, G39, G42, G50, RZ41

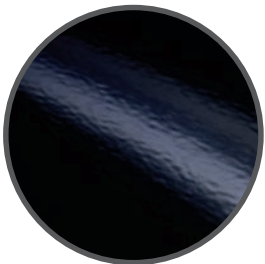

BLACK ENAMELED STEEL
Q1, Q2, Q3, G39, G42, G50, RZ41



LEDGESTONE
Q1, Q3, G39, G42, G50, RZ41



HERRINGBONE
Q2, G39, G42, G50, RZ41

BURNER STYLES



CLASSIC LOG SET
Q1



TRADITIONAL LOG SET
Q2, Q3, G39, G42, G50



BIRCH LOG SET
G39, G42, G50



DRIFTWOOD LOG SET
Q2, G39, G42, G50



TRADITIONAL "FIRE-UNDER-LOG"
RZ41



BIRCH "FIRE-UNDER-LOG"
RZ41



GLASS MEDIA
Q2, G39, G42, G50

Fireplace Design Elements

Fireplace Surrounds	Q1		Q2		Q3		RZ41		G39		G42		G50	
	GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE	
Minimal Surround	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
	22 ¾"	26 ⅜"												
Minimal Surround Four-Sided	24 ¼"	27 ½"												
Modern Surround*	30"	30"												
Slim Face			32 ¾"	28 ¾"	32 ¾"	32"	37 ¾"	33 ¼"	37 ¾"	33 ¼"	42 ½"	37"	50 ½"	39"
Forgeworks Face			33 ⅞"	29 ¼"	35 ⅞"	32 ⅞"			38 ¾"	33 ¾"	42 ½"	37"	50 ½"	39"

Firebox Liners	Q1		Q2		Q3		RZ41		G39		G42		G50	
	GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE	
Classic Brick	Optional		Optional		Optional									
Rustic Brick							Optional		Optional		Optional		Optional	
Painted Steel	Included						Included		Included w/Log SKU		Included w/Log SKU		Included w/Log SKU	
Black Enameled Steel	Optional		Optional (included with Q2G)		Optional		Optional		Included w/Glass SKU		Included w/Glass SKU		Included w/Glass SKU	
Ledgestone	Optional				Optional		Optional		Optional		Optional		Optional	
Herringbone			Optional				Optional		Optional		Optional		Optional	

Burner Variations	Q1		Q2		Q3		RZ41		G39		G42		G50	
	GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE	
Classic Log Set	Included													
Traditional Log Set			Included		Included				Optional		Optional		Optional	
Birch Log Set									Optional		Optional		Optional	
Driftwood Log Set			Optional						Optional		Optional		Optional	
Traditional Log Set - "Fire-Under-Log"							Optional							
Birch Log Set - "Fire-Under-Log"							Optional							
Glass Media			Top vent only						Optional		Optional		Optional	

Additional Features	Q1		Q2		Q3		RZ41		G39		G42		G50	
	GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE	
Run Quiet Fan System	Included		Included		Included		Included		Included		Included		Included	
Remote Control	Included		Included		Included		Included		Included		Included		Included	
Cool Surface System (HDK)							Built-in		Built-in		Built-in		Built-in	
Power Vent Kit							Optional		Optional		Optional		Optional	
Ceramic Glass	Included		Included		Included		Included		Optional		Included		Included	
Ember Bed Lighting (Log IPI Only)							Included		Included w/IPI		Included w/IPI		Included w/IPI	


Fireplace Specifications

Performance	Q1		Q2		Q3		RZ41		G39		G42		G50	
	GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE		GAS FIREPLACE	
BTU Max input - NG / LP	20,000 / 18,500		24,000 / 20,000		38,000 / 38,000		40,000 / 38,000		30,000 / 30,000		40,000 / 40,000		48,000 / 48,000	
Turn Down*	33%		33%		33%		33%		33%		33%		67.5% w/Split flow	
IPI	Available		Available		Available		Standard		Available		Available		Standard	
Efficiency - Steady State**	76.1%		70.7%		71.6%		69.2%		71.37%		72.1%		75.7%	
Efficiency - FE rating (P4)†	74.5%		69.3%		67.3%		66.2%		69.8%		69.6%		72.8%	
Visible Dimensions (w/h)	20" x 25¼"		33¼" x 29⅝"		33" x 33"		38¼" x 34"		38¼" x 34"		43" x 38"		51" x 40"	
Visible Glass Area (w/h)	16⅝" x 18¾"		26" x 21¼"		26" x 24¼"		31¾" x 25⅝"		30" x 24"		34" x 26⅞"		41⅜" x 28"	
Run-Quiet Fan System	150 CFM		150 CFM		150 CFM		130 CFM		130 CFM		130 CFM		130 CFM	

Installation	Q1			Q2			Q3			RZ41			G39			G42			G50		
	GAS FIREPLACE			GAS FIREPLACE			GAS FIREPLACE			GAS FIREPLACE			GAS FIREPLACE			GAS FIREPLACE			GAS FIREPLACE		
Framing Dims (w/Screen)	W	H	D	W	H	D	W	H	D	W	H	D	W	H	D	W	H	D	W	H	D
	25 ¼"	35 ¼"	17 ⅝ 17"	34 ⅝"	40"	15 ⅞"	34 ⅝"	43 ½"	18"	41"	43 ½"	20"	41 ½"	42"	18 ¼"	48 ¾"	50"	23 ¼"	55"	50"	23 ¼"
Venting Collar Size	4" x 6 ⅝"			4" x 6 ⅝"			4" x 6 ⅝"			5" x 8" Rigid			4" x 7" Flex & 4" x 6 ⅝" Rigid			5" x 8" Flex & 5" x 8" Rigid			5" x 8" Flex & 5" x 8" Rigid		
Venting Orientation	Top / Rear			Top / Rear			Top / Rear			Top			Top			Top			Top		
LP Conversion Kit (IPI)	Optional			Optional			Optional			Optional			Optional			Optional			Optional		
Weight (Average weight inc. liner & media)	110 lbs			187 lbs			275 lbs			425 lbs			300 lbs			414 lbs			489 lbs		

Clearance to Combustibles	Q1	Q2	Q3	RZ41	G39	G42	G50
A - Side of unit to side wall	7"	5¼"	9¾"	1"	7"	7"	7"
B - Minimum clearance to chase ceiling ††	35¼" 41"	43½" 54"	43½" 82"	79½"	72"	78"	78"
C - Minimum clearance to mantle height	35¼"	42"	43½"	45¼"	45"	45¼"	48"
D - Maximum mantle depth @ Min. Height	2"	2"	2"	4"	4"	4"	4"
E - Front of door to edge of floor protection	12"	0"	0"	0"	0"	0"	0"

* Turn down based on P4 efficiencies on low.
** Steady state rating based on conventional venting configuration.
† Efficiency based on the P4-15 measured efficiency rating of the IPI models
†† Q1, Q2, & Q3, Rear vent and top vent

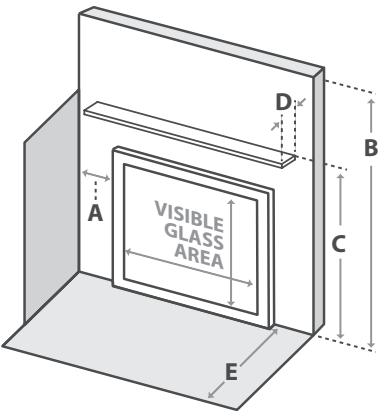

The best way to visualize
your dream fireplace at home
is with the Enviro App!



Manufactured by Sherwood Industries Ltd • Victoria, BC, Canada
enviro.com • info@enviro.com • Printed in Canada, April 2026

